



VQCSE

VideoQ Color Space Explorer

Training Presentation


September 2025



VQCSE

videoq.com

Table of Contents





- 1. Color Space Explorer Dynamic Test
- 2. Challenge and Solution
- 3. Applications
- 4. VQCSE Test Patterns Suite
- 5. VQCSE Test Suite Video Formats
- 6. VQCSE-YUV Test Composition
- 7. VQCSE-RGB Test Composition
- 8. Media File Timeline Segments
- 9. Text Box Example
- 10. About VideoQ

- A1. Appendix A: Background Info
- B1. Appendix B: Usage Examples
- B2. Full Bandwidth Zone Plate Test Usage
- B3. Checking UV Data Levels VectorScope
- B4. Checking YUV Data Levels Waveform Monitor
- B5. Checking Bit Depth LSB Image
- B6. Checking Video Players Rendered RGB Images
- B7. Checking Players Screen Grabber Waveforms #1
- B8. Checking Players Screen Grabber Waveforms #2

1. Color Space Explorer TM Dynamic Test



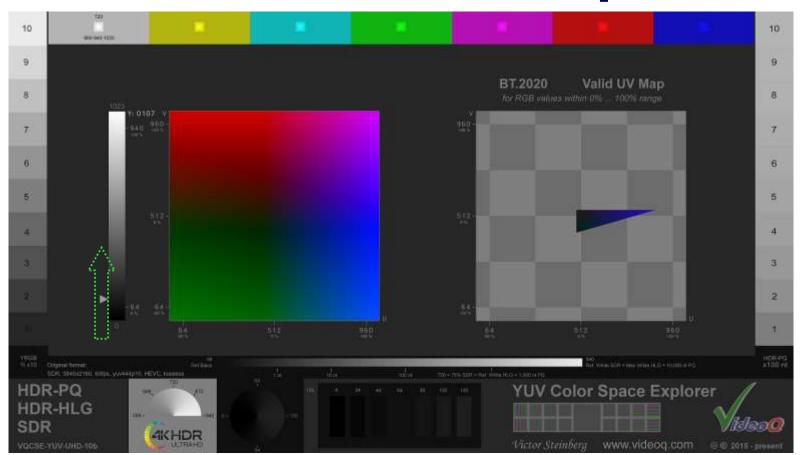

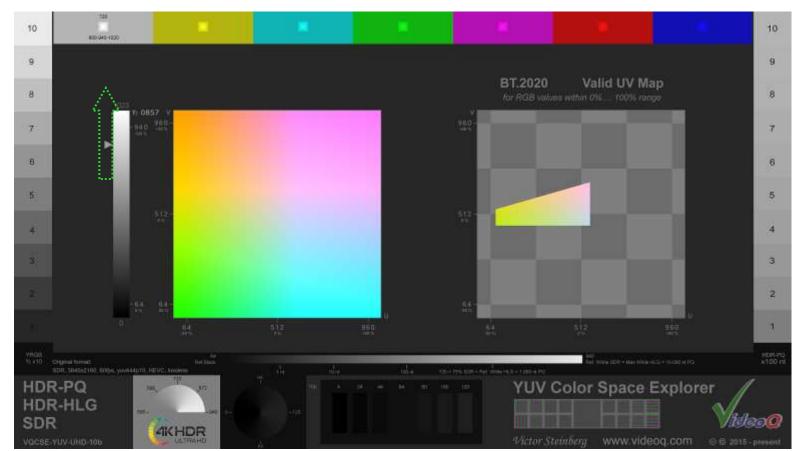

color space. For example, the VQCSE_YUV variant covers all combinations of Y, U and V values – from 0 to 1023, including all "illegal" colors.

For any given Y 10b value "Valid UV Map" on the right side shows the boundaries of "legal" colors area.

VQCSE is equally suitable for **SDR**, **HDR-PQ** and **HDR-HLG** systems, checking processors, codecs and display performance. It is suitable for both visual and instrumental tests, the results are visible on regular video monitors, waveform monitors and/or vectorscopes. VQCSE is especially efficient in combination with the VideoQ <u>VQV</u> Viewer-Analyzer tool.

2. Challenge and Solution



The major effort in capturing, delivering, and rendering of high-quality moving images, demands the guidance and commonly accepted rules. The issues of tone mapping, color legalization, color banding and bit depth handling, are not yet fully resolved and often misunderstood. The solution, is to establish easy-to-use rules and related tools, through the expanded derivatives of VideoQ Color Space Explorer Test Patterns suite.

The so-called "three-point monitoring" approach provides for the correct detection of workflow parts responsible for the overall color distortions:

- 1. Insert test pattern at the source or any other test point within the workflow, e.g. encoder input
- 2. Check colors representation at the output of the encoder, transcoder or packager
- 3. Finally, check it again at the player/display screen output

The long history of broadcast TV demonstrates the path, from the usage of physical reflectance test charts, to the extremely successful practice of using color bars test patterns, and finally to modern sophisticated dynamic test patterns used to check, calibrate and ensure reliable exchange of video images on a global scale.

VideoQ has been active in standards and test patterns creation, so we can now publish and release the calibrated VideoQ Color Space Explorer (VQCSE) test tools suite that meet this challenge.

The best way to reliable QA is via reliable QC!

3. Applications



VQCSE is the picture quality control, calibration and verification tool for use by general public, video installers, hardware and software developers, video development labs, production, post-production and content distribution facilities in the fields of:

- TV sets, video monitors and displays development, testing and benchmarking
- Software and hardware video players development, testing and benchmarking
- Video transcoding and video data compression
- Consumer electronics
- Digital cinema
- Home theatres
- IPTV, CDN, VOD, OTT
- Cloud video processing, transcoding and streaming


VQCSE tests are useful when processing and delivering in multiple formats or when converting between formats.


They can simplify test procedures and reduce the opportunity for misinterpretation of signal parameters and misalignment of systems.

4. VQCSE Test Patterns Suite



VideoQ VQCSE suite of UHD test patterns consists of 48 variants covering RGB and YUV color spaces, SDR, HDR-PQ and HDR-HLG encoding variants, and 8 different frame rates.

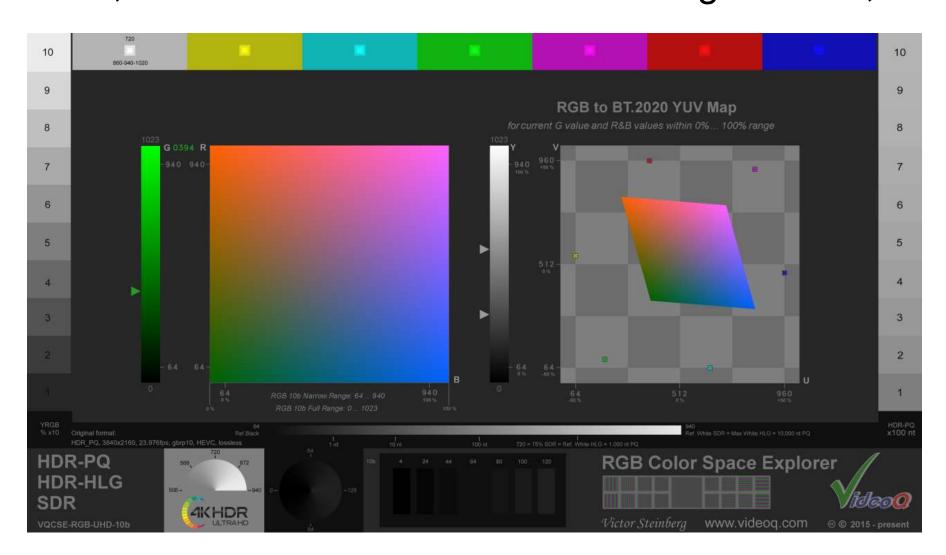

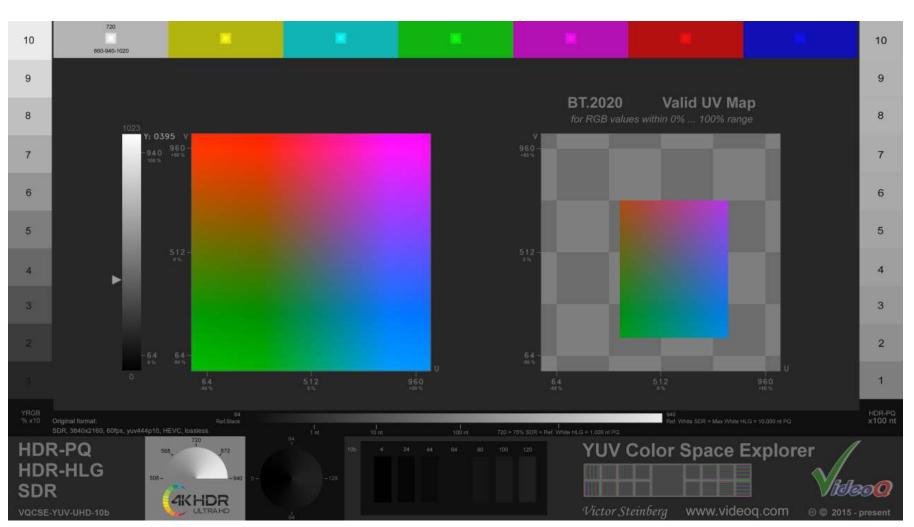

The following **Appendix A** provides general background information, whilst the **Appendix B** provides more details about VQCSE test sessions scenarios, VideoQ software tools usage examples and test patterns features.

5. VQCSE Test Suite Video Formats



VQCSE suite includes 48 different combinations of

- 1 frame size: UHD 3840x2160
- 2 color spaces: YUV and RGB
- 3 dynamic range formats: SDR, HDR-PQ and HDR-HLG
- 8 frame rates: 23.976, 24, 25, 29.97, 30, 50, 59.94, and 60 fps

Special frame sizes, e.g. down-scaled HD 1920x1080 or other sizes, are available on request

VQCSE suite files are encoded into 2 default formats:

- YUV variants:
 - Lossless yuv444p10le HEVC, MP4, EAC3 LR audio
- RGB variants:
 - Lossless gbrp10le HEVC, MP4, EAC3 LR audio

Other formats, e.g. uncompressed RGB (r210) or YUV (v210) MOV, or lossy yuv420p10le MP4, are available on request.

6. VQCSE-YUV Test Composition






Valid YUV Palette

Fixed current Y value, Full Range UV values

Valid colors fragment of Main YUV Palette

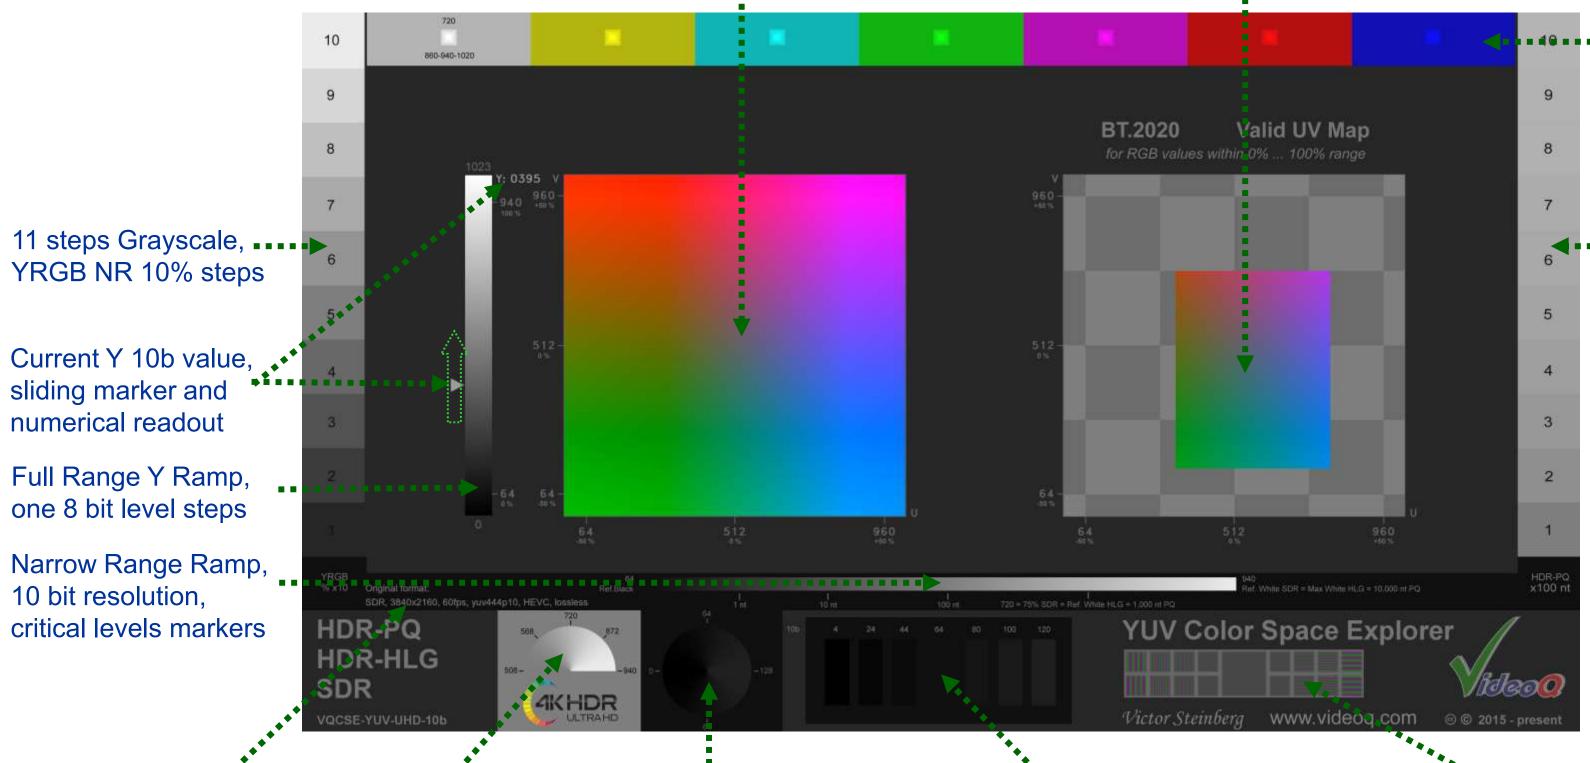

75% Color Bars and Two-tones Clipping Test Patches

11 steps Grayscale, PQ 100 nit steps, from 0 to 1000 nit

Original Format

Media Info Message

White SPLUGE Conical Grayscale

Black SPLUGE Conical Grayscale Narrow Range PLUGE, Reference Black and 6 Gray Bars

Color sub-sampling and scaling test

7. VQCSE-RGB Test Composition




Main RGB Palette

Valid YUV values: Y Ramp sub-range and UV Palette

Fixed current G value, Full Range RB values

mapped from main RGB Palette Narrow Range values

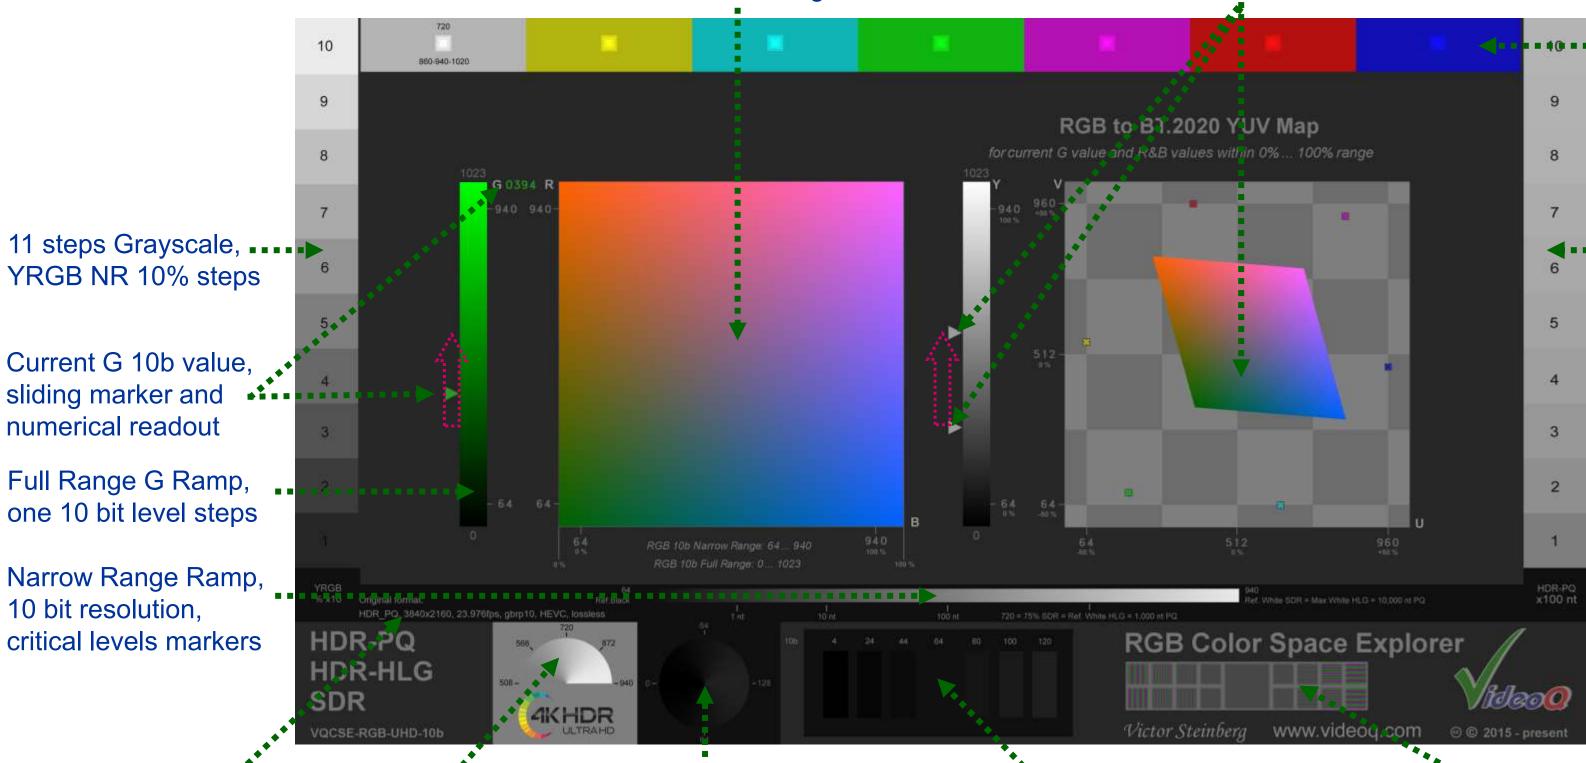

75% Color Bars and Two-tones **Clipping Test Patches**

11 steps Grayscale, PQ 100 nit steps, from 0 to 1000 nit

Original Format Media Info Message

White SPLUGE Conical Grayscale

Black SPLUGE Conical Grayscale

Narrow Range PLUGE, Reference Black and 6 Gray Bars

Color sub-sampling and scaling test

8. Media File Timeline Segments




VQCSE sequence is suitable for automated repetitive lab testing. The sequence consists of two segments:

- 0s~5s: **Text Box** containing all test pattern details and machine-readable **QR Code**,
- 5s~Ns: Color Space Explorer test pattern, test pattern and total sequence durations depend on the selected frame rate.




Optional audio stream composition (LR stereo, EAC3):

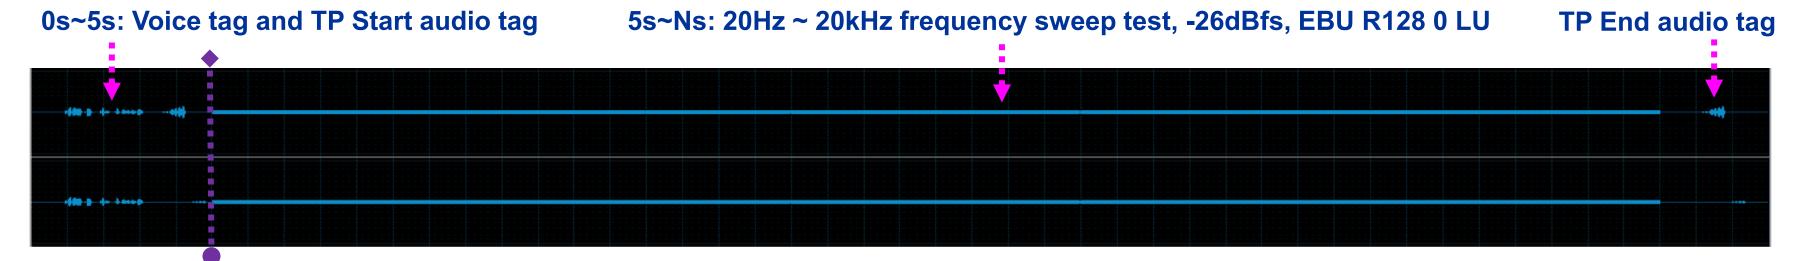

9. Text Box Example



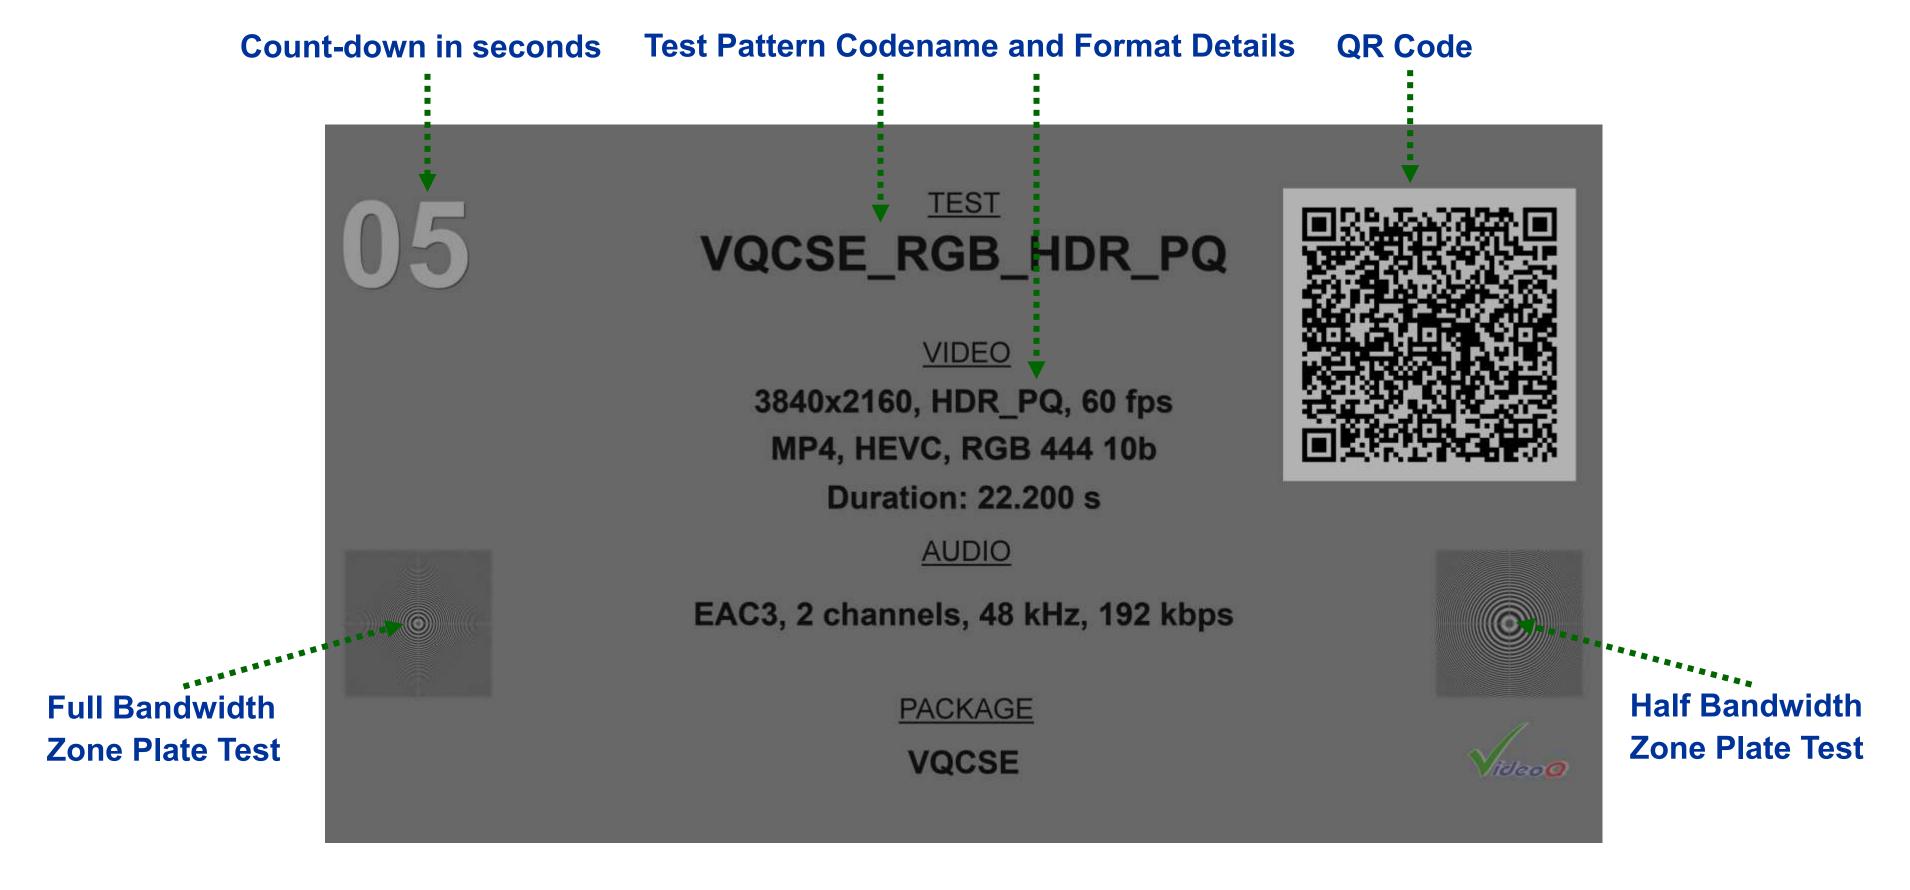

10. About VideoQ



Customers & Partners

























































































Company History



- Founded in 2005
- Formed by an Engineering Awards winning team sharing between them decades of global video technology.
- VideoQ is a renown player in calibration and benchmarking of Video Processors, Transcoders and Displays, providing tools and technologies instantly revealing artifacts, problems and deficiencies, thus raising the bar in productivity and video quality experience.
- VideoQ products and services cover all aspects of video processing and quality assurance - from visual picture quality estimation and quality control to fully automated processing, utilizing advanced
 VideoQ algorithms and robotic video quality analyzers, including latest UHD and HDR developments.

Operations

- Headquarters in CA, USA
- Software developers in Silicon Valley and worldwide
- Distributors and partners in several countries
- Sales & support offices in USA, UK

A1. Appendix A: Background Info



International Telecommunication Union (ITU) Recommendation BT.2020 defines various aspects of ultra-high-definition television (UHDTV) with standard dynamic range (SDR) and wide color gamut (WCG).


It mandates the use of RGB ⇔ YUV Color Space Conversion **BT.2020 Matrices** for the frame sizes greater than HD. Note that RGB ⇔ YUV conversion in ubiquitous **HD** format relies on significantly different **BT.709 Matrices**.


Since the introduction of **BT.601** standard YUV data are generated in **Narrow Range** format (abbreviated as **NR**). Main advantage of the NR format is the availability of extra levels below **Reference Black** and above **Reference White**.


However, the RGB data traditionally used in production and post-production are defined in two formats – **Full Range** format (**FR RGB**, without reserved levels) and **Narrow Range** format (**NR RGB**, similar to NR YUV).

Thus, generic RGB ⇔ YUV conversion workflows should handle FR/NR RGB, NR YUV and BT.2020/BT.709 Matrices.


The HDR/SDR conversion processes are even more complicated, note the **Unified Reference White** concept.

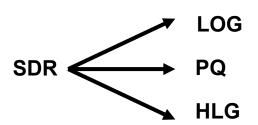

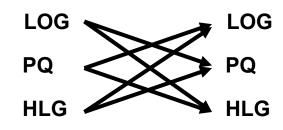

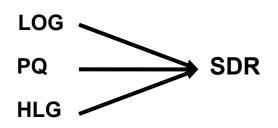



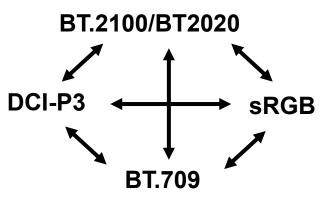

B1. Appendix B: Usage Examples





This section provides more details about VQCSE test sessions scenarios, VideoQ software tools usage examples and test patterns features.


The screenshots and measurement results shown in this section are taken from VideoQ VQV – Media Files Viewer-Analyzer:

B2. Full Bandwidth Zone Plate Test Usage



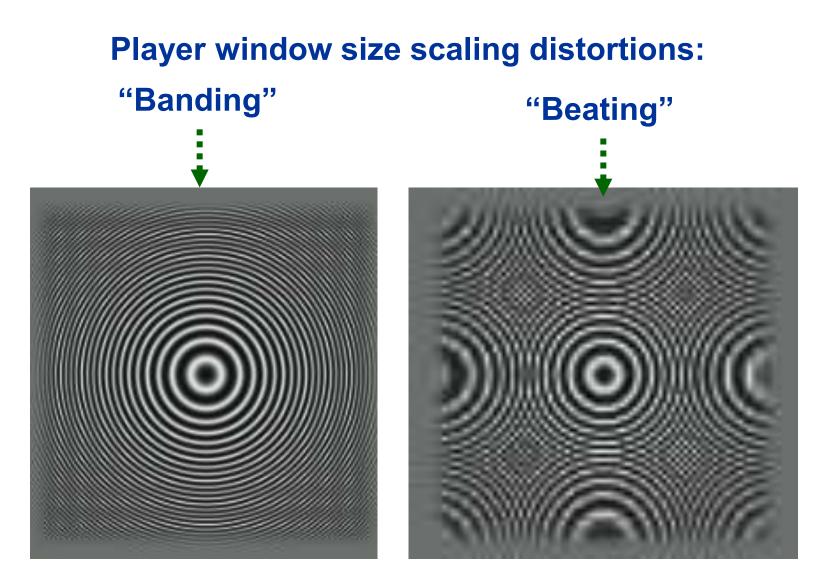


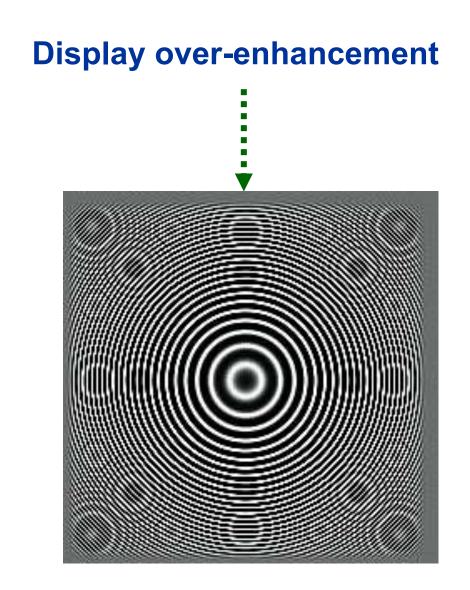

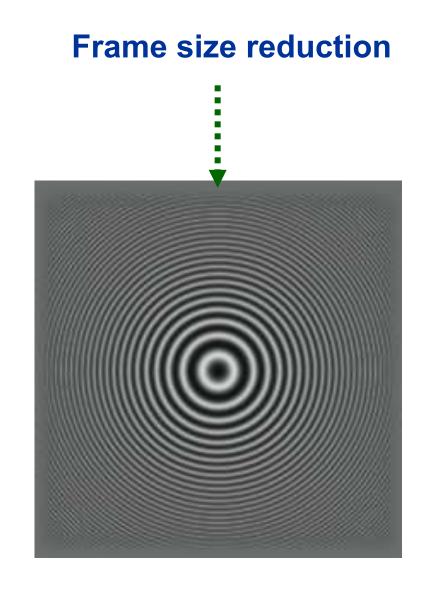





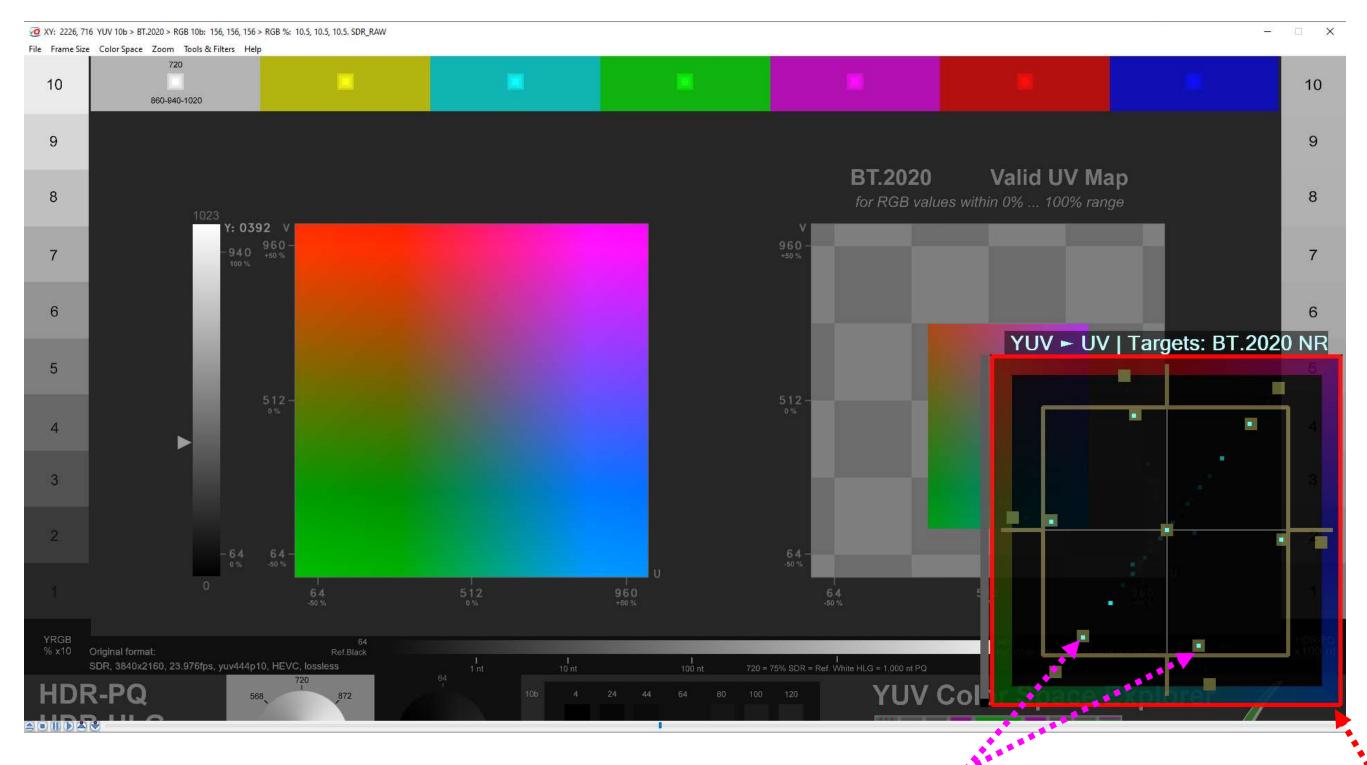


Color Bars UV data are correct – all vectors hit the centers of 7 target boxes.

Palette UV values are reaching the **boundaries** of UV **Full Range** as emphasized by VectorScope **Red Frame** It means that UV data of the original VQCSE test are **not clipped**.

B4. Checking YUV Data Levels – Waveform Monitor



User-selected Waveform Monitor Analysis Area: Lines Range & Pixels Highlight Mask

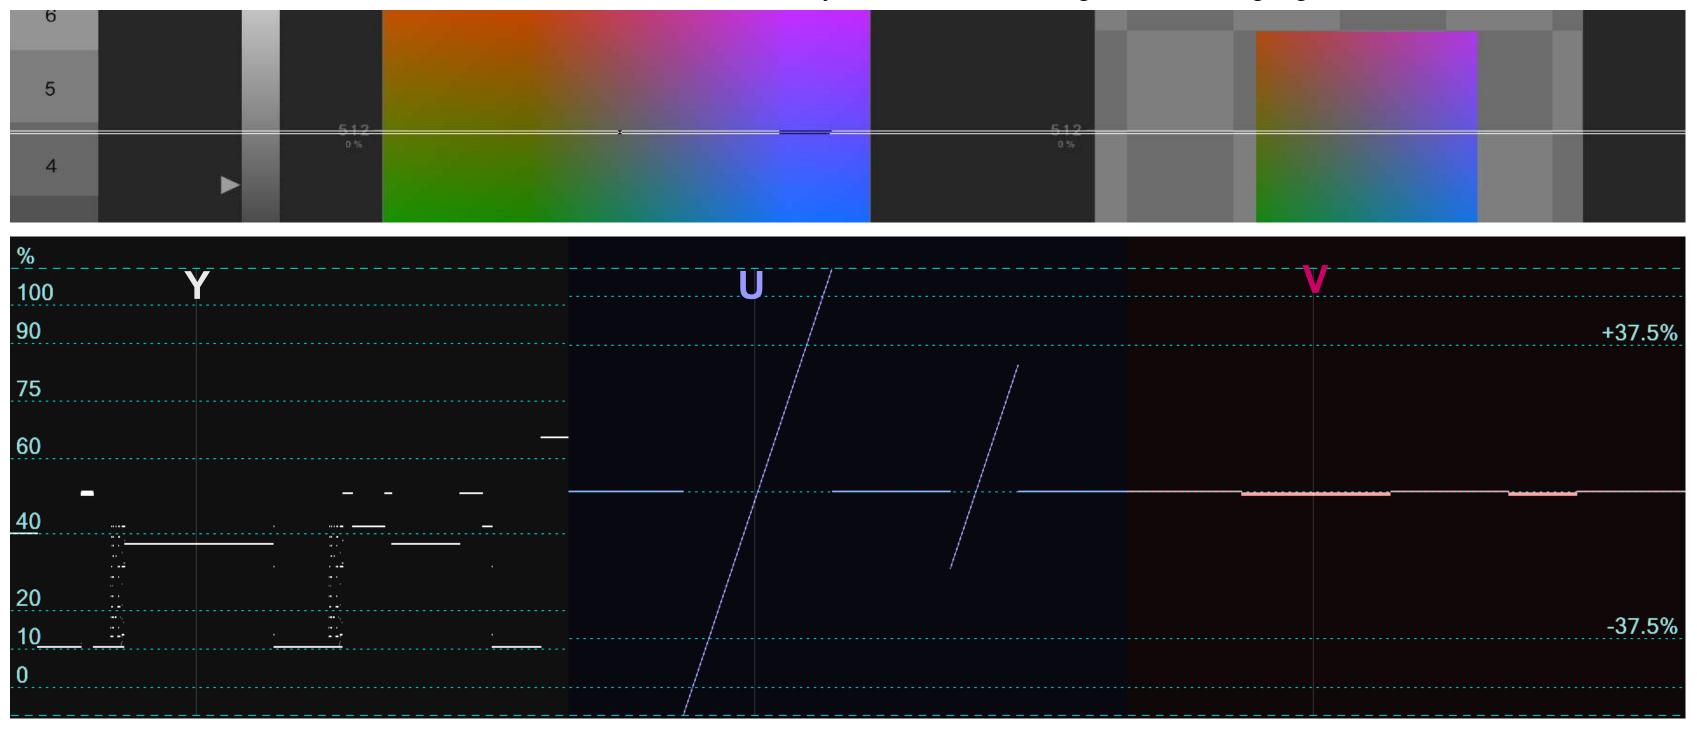

VQCSE Main Palette YUV data are correct – Y and V values are constant within the selected area (waveform horizontal lines);

U values are **linearly rising** covering **Full Range** – as it should be for the original **unclipped** VQCSE test.

The absence of bends or breaks indicates the absence of color processing or distortions.

B5. Checking Bit Depth – LSB Image





VQCSE_YUV_SDR MSBs Image

Within the Main UV Palette and Y Ramp areas:

LSBs image shows 4 gradations, i.e. 2 LSBs are active.

It means that actual bit depth is: 8 MSBs + 2 LSBs = **10 bit**

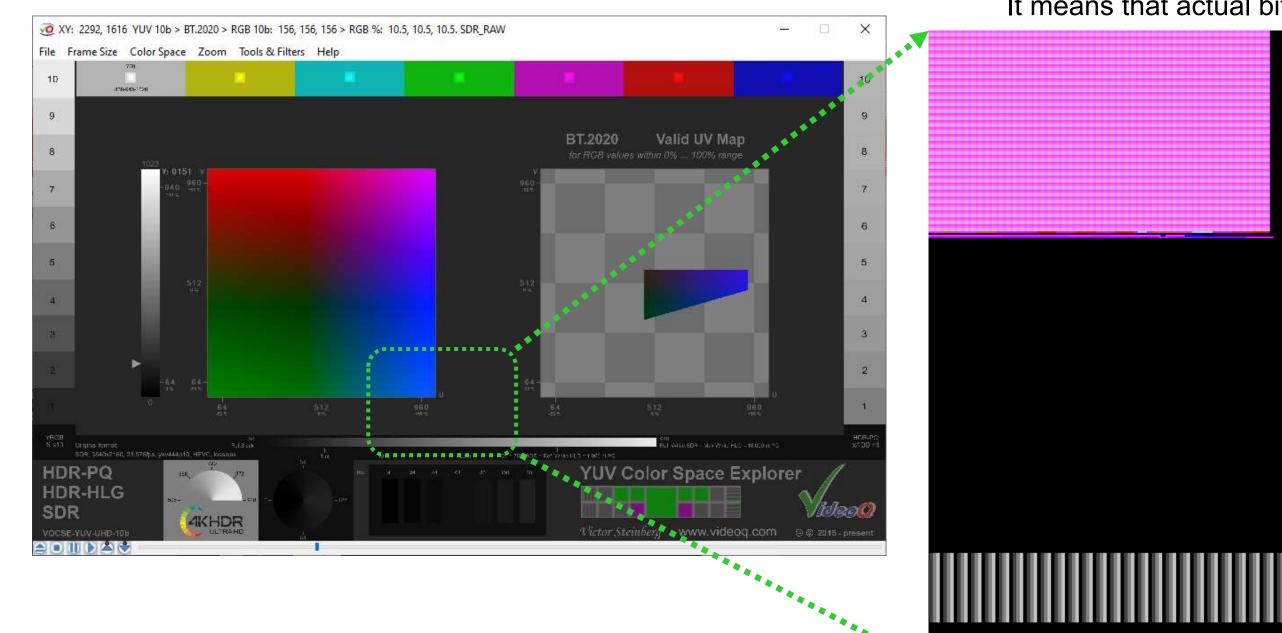

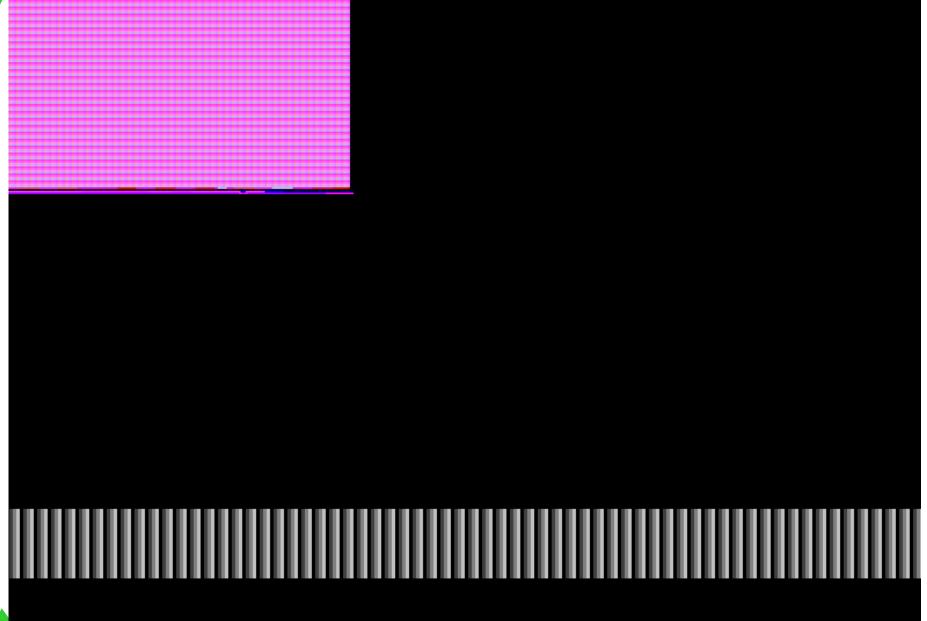



Max 4:1 Zoom centered on the selected area


LSB image gradations patterns are uniform, it means that the original data have been not scaled: – preserving one 10b increment per pixel


B6. Checking Video Players Rendered RGB Images



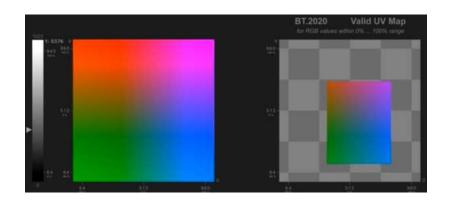

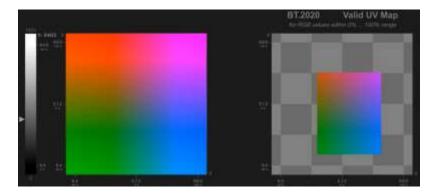

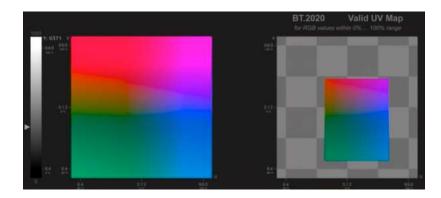

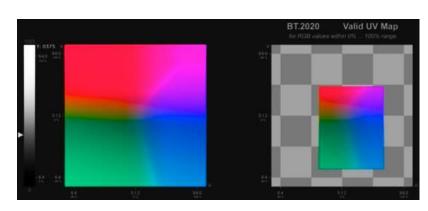

Click on the links below to see the screen-grabber video:

VQCSE-YUV Player1 SlightBanding.webm

VQCSE-YUV Player2 SlightBanding.webm


VQCSE-YUV Player1 SevereBanding.webm

VQCSE-HDR2SDR SevereBanding.webm

B7. Checking Players – Screen Grabber Waveforms #1



User-selected Waveform Monitor Analysis Area: Lines Range & Pixels Highlight Mask

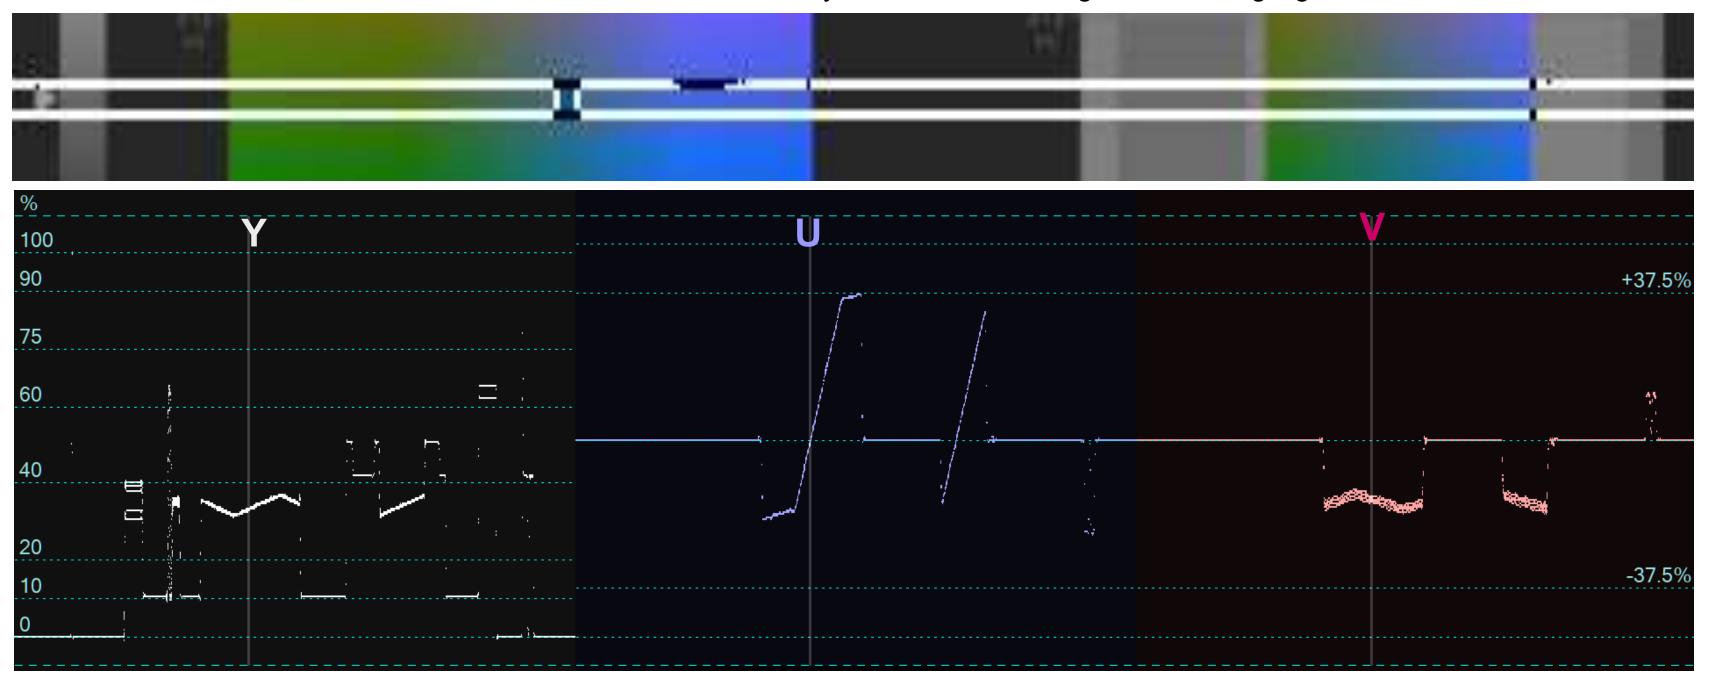

Palette YUV data are not exactly correct – Y and V values are not perfectly flat or linear ramps within Valid YUV Range;

U values rise within Valid YUV Range is almost linear, but they are clipped beyond its boundaries (YUV to RGB conversion result).


The absence of strong bends or breaks within the Valid YUV Range indicates the absence of strong color distortions.

VQCSE-YUV_Player1_SlightBanding.webm

B8. Checking Players – Screen Grabber Waveforms #2



User-selected Waveform Monitor Analysis Area: Lines Range & Pixels Highlight Mask

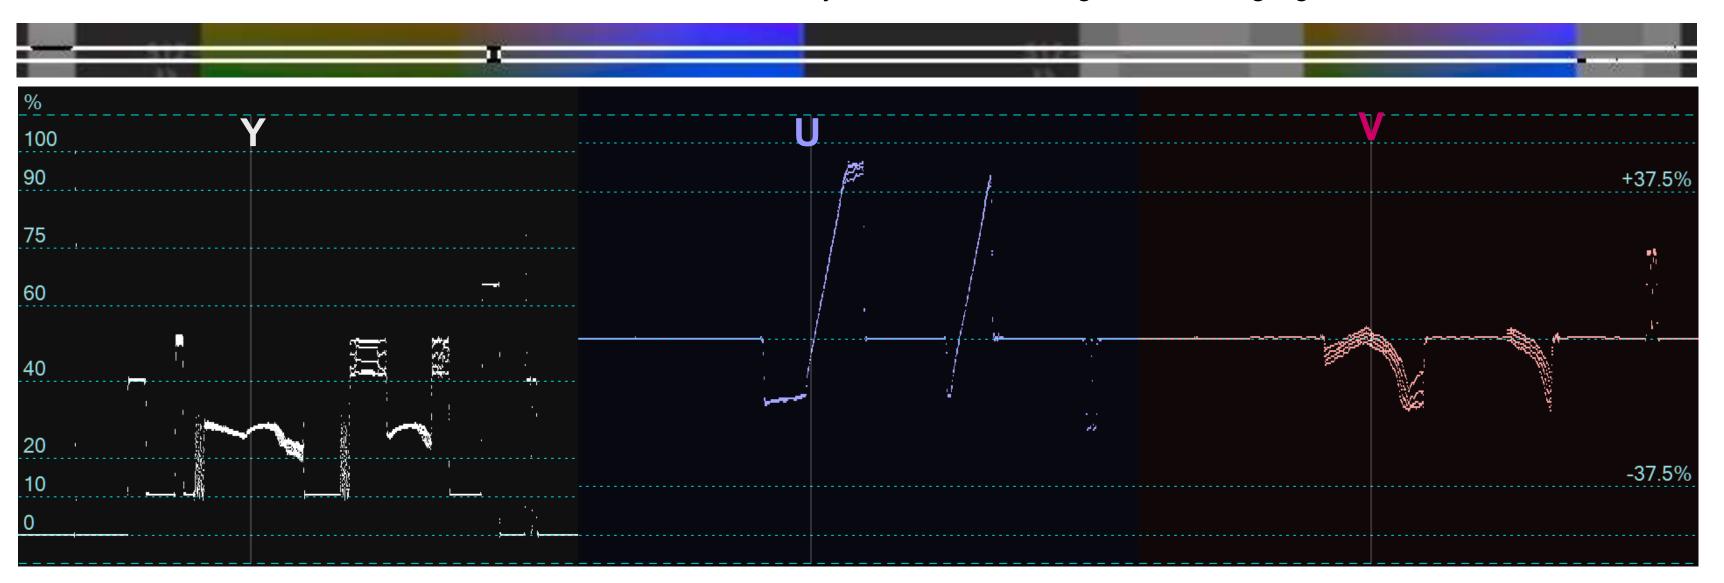

Palette SDR YUV data are seriously distorted – within the Valid YUV Range Y and V waveforms are visibly bent;

U values rise within Valid YUV Range is almost linear, but they are clipped beyond its boundaries (YUV to RGB conversion result).

Strong bends and breaks within the Valid YUV Range indicate strong color distortions.

VQCSE-YUV Player1 SevereBanding.webm